


FLKM 14-PA-SLC500/IN/M

Order No.: 2293475

The illustration shows version FLKM 14-PA-SLC500/OUT

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293475>VARIOFACE front adapter, 2 x 8 channels can be connected, for
Allen-Bradley SLC 500, 1746 IV16, and ITV16

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 108878 |
| Note | Made-to-order |
| sales group | I601 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 192 (IF-2009) |

Product notesWEEE/RoHS-compliant since:
01/25/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|---------------------------------|--|
| General | |
| Nominal voltage U_N | < 50 V AC 60 V DC |
| Connection type, plug connector | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of plug connectors | 2 |

| | |
|---|--|
| No. of positions, plug connector | 14 |
| Number of positions | 14 |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position | Any |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |
| Max. permissible current | 1 A (per path) |
| Max. permissible total current | 2 A (Per Byte, for supply via connector) |
| Pollution degree | 1 |
| Surge voltage category | II |
| Supported controller | ALLEN-BRADLEY SLC 500 |
| Supported I/O card | 1746 IV16 |
| | 1746 ITV16 |

Certificates / Approvals




Certification

CUL, GOST, UL

Diagrams/Drawings

Circuit diagram

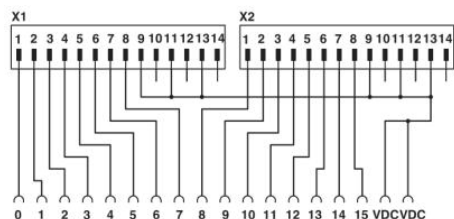

Connection scheme FLKM 14-PA-SLC500/IN/M

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;