


- Features:
- Fireproof construction
 - Low temperature coefficient
 - Low resistance value ceramic encased resistor
 - All welded termination
 - RoHS compliant / lead-free
 - Formed leads possible on some sizes – contact factory
 - See CB datasheet for performance and environmental specifications




Electrical Specifications					
Type / Code	Power Rating (Watts) @ 70°C	Resistance Temperature Coefficient(1)	Ohmic Range (Ω) and Tolerance		
			1%	5%	10%
LCBF2	2W	±200 ppm/°C	-	0.05 - 0.33	-
LCB3	3W	±50 to ±400 ppm/°C	0.005 - 0.1	0.005 - 0.1	0.005 - 0.1
LCB5	5W	±50 to ±400 ppm/°C	0.005 - 0.1	0.005 - 0.1	0.005 - 0.1
LCB7	7W	±50 to ±400 ppm/°C	0.01 - 0.15	0.01 - 0.15	0.01 - 0.15
LCB10	10W	±50 to ±400 ppm/°C	0.01 - 0.2	0.01 - 0.2	0.01 - 0.2
LCB15	15W	±50 to ±400 ppm/°C	0.01 - 0.2	0.01 - 0.2	0.01 - 0.2

(1) TCR is value dependent. Please contact factory for specific data.

Resistance measured 3/8" from the body

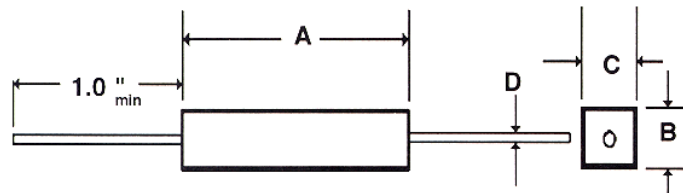


Alternate Configuration Series LCBF:



Mechanical Specifications						
Type / Code	A	B	C	D	E (LCBF only)	Unit
LCBF2	0.71 ± 0.04	0.16 ± 0.02	0.28 ± 0.02	0.03 ± 0.002	0.20 + 0.04 -0.02	inches
	18.00 ± 1.00	4.00 ± 0.50	7.00 ± 0.50	0.80 ± 0.05	5.00 + 1.00 -0.5	mm
LCB3	0.87 ± 0.03	0.31 ± 0.03	0.31 ± 0.03	0.03 ± 0.002	0.37 ± 0.03	inches
	22.20 ± 0.80	7.90 ± 0.80	7.90 ± 0.80	0.81 ± 0.05	9.50 ± 0.80	mm
LCB5	0.87 ± 0.03	0.37 ± 0.03	0.37 ± 0.03	0.03 ± 0.002	0.44 ± 0.03	inches
	22.20 ± 0.80	9.50 ± 0.80	9.50 ± 0.80	0.81 ± 0.05	11.10 ± 0.80	mm
LCB7	1.40 ± 0.03	0.37 ± 0.03	0.37 ± 0.03	0.04 ± 0.002	0.50 ± 0.03	inches
	35.60 ± 0.80	9.50 ± 0.80	9.50 ± 0.80	0.91 ± 0.05	12.70 ± 0.80	mm
LCB10	1.87 ± 0.03	0.37 ± 0.03	0.37 ± 0.03	0.04 ± 0.002	0.50 ± 0.03	inches
	47.60 ± 0.80	9.50 ± 0.80	9.50 ± 0.80	0.91 ± 0.05	12.70 ± 0.80	mm
LCB15	1.87 ± 0.03	0.50 ± 0.03	0.50 ± 0.03	0.04 ± 0.002	0.63 ± 0.03	inches
	47.60 ± 0.80	12.70 ± 0.80	12.70 ± 0.80	0.91 ± 0.05	15.90 ± 0.80	mm

How to Order

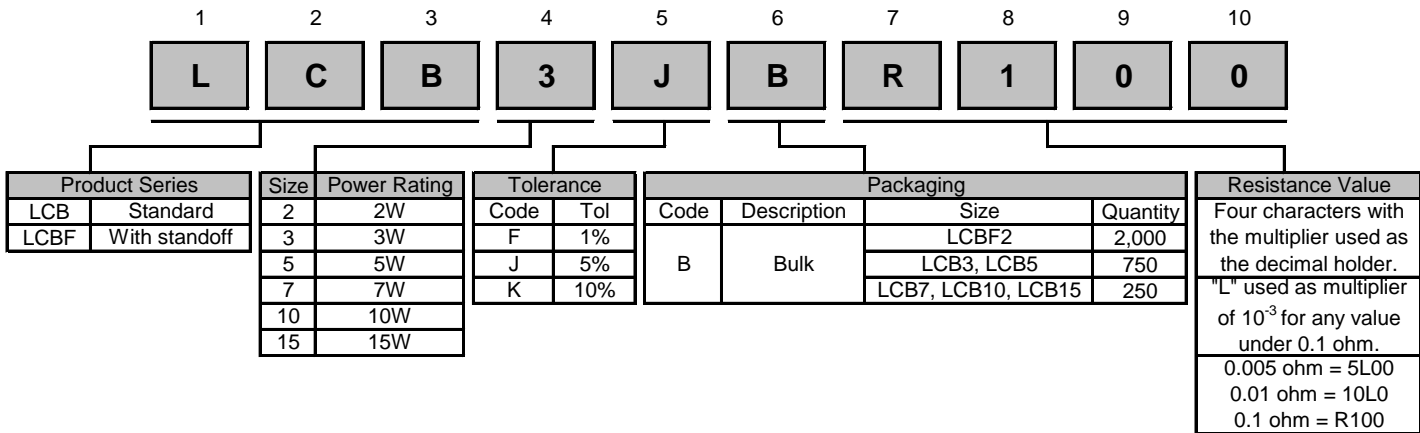

Legacy Part Number (before January 3, 2011):

SEI Type		Code		Nominal Resistance	Tolerance	Packaging				
LCB		3		0.1	5%	B				
Type	Description	Code	Wattage			Tolerance	Types	Qty	Description	Code
LCB	Standard	2	2W			1%	LCBF2	2,000	Bulk	B
LCBF	With Standoff	3	3W			5%	LCB3, LCB5	750		
		5	5W			10%	LCB7, LCB10, LCB15	250		
		7	7W							
		10	10W							
		15	15W							