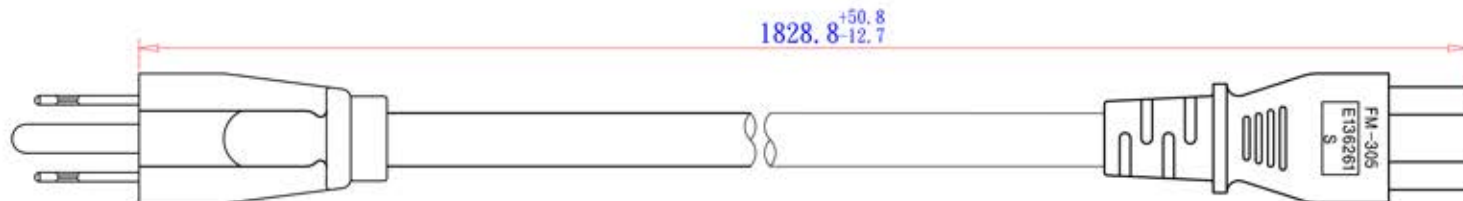




插頭部件 (Plug Component)			頭部削皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部削皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內制(Strip)	外制(Roj)	顏色(Color)		外制(Roj)	內制(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P黑色 90A±2A Black	ME-301 (10A 125V~) (NEMA 5-15P)	1	5 ⁺¹ ₋₀	23±1	黑/Black(L)	SVT 18AWG/3C 105°C 黑色(Black) 線長: (Length) 1828.8 ^{+50.8} _{-12.7}	22±1	5 ⁺¹ ₋₀	黑/Black(L)	35P黑色 90A±2A Black	FM-305 (10A 125V~) (IEC 320 C5)	1
鍍鎳 Nickel-Plated	Ø4.75 圓管端子 (Earth Pin Terminal)	1	5 ⁺¹ ₋₀	23±1	白/White(N)		22±1	5 ⁺¹ ₋₀	白/White(N)	銅本色 (Copper)	電腦電源線端子 (Computer power cord terminals)	3
鍍鎳 Nickel-Plated	6.3*1.5 單片圓頭端子 (Solid Blades)	2	5 ⁺¹ ₋₀	23±1	綠/Green(E)		22±1	5 ⁺¹ ₋₀	綠/Green(E)	白色(White)	FM-302兩件式內模 (FM-302 Inner Body)	1
白色(White)	301單件式內模 (301 Inner Body)	1										

Earth Ground (Green)
Ø4.75±0.15插頭端面圖
(Dimensions of Plug Face)Insulation Thickness 0.38 mm
Overall Diameter 2.0±0.10 mmCopper Conductor
41/0.160±0.004 mm
Resistance 22.4
(20°C (Max). ohms/km)Jacket Thickness 0.76 mm
Overall Diameter 6.3±0.15 mm線材截面圖
(Wire Cross-Section)

綠/Green(E)

插頭端面圖
(Dimensions of Plug Face)

包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	Detachable Label
正側唛頭 (Carton Print)	依客戶要求印刷 (See Purchase Order)
電線印字內容 Wire Printed	使用充實線材 四印字 (Un-Filler, Gravure)
V E322763 (UL) SVT 18AWG(0.824mm ²)x3C VW-1 105°C 300V /FT c(UL) SVT 18AWG(0.824mm ²)x3C FT2 105°C 300V -LF- (UL) SVT 18AWG(0.824mm ²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SVT 18AWG(0.824mm ²)x3C FT2 105°C 300V 1L43774 -F- -LF-	電箱唛頭標碼 Shipping Mark

CnC

SIGNATURE	NAME	DATE		
APPROVED			2011 1123	新版發行
M.F.G. CHECKED			REV DATE	DESCRIPTION
Q.A. CHECKED			PART No.	800-18-39B-BL-0006F
DRAWN	楊承正	2011/11/23	DWG No.	
CUSTOMER		CnC Tech. LLC Industrial Cable and Connector Technology		