


FLKM 40-PA-MA12/S100

Order No.: 2287533

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2287533>

Front adapter, for Siemens SIMATIC® S5-100U I/O card 6ES5
482-8MA13 1 x 32 channels can be connected

Commercial data

GTIN (EAN)	 4 017918 056391
Note	Made-to-order
sales group	I600
Pack	2 pcs.
Customs tariff	85369010
Catalog page information	Page 158 (IF-2002)

Product notes

WEEE/RoHS-compliant since:
01/02/2008



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General

Nominal voltage U_N	< 50 V AC
	60 V DC
Max. perm. current (per branch)	0.5 A
Max. perm. current (separate power supply)	4 A (per slip-on connection (0+; 1+; 2+; 3+))
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	1
No. of positions, plug connector	40
Number of positions	40
Ambient temperature (operation)	-20 °C ... 50 °C
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Supported controller	SIEMENS S5-95U/ET100U S5-100U/ET200U
Supported I/O card	482-8MA13

Certificates / Approvals




Certification

CUL, GOST, UL

Diagrams/Drawings

Circuit diagram

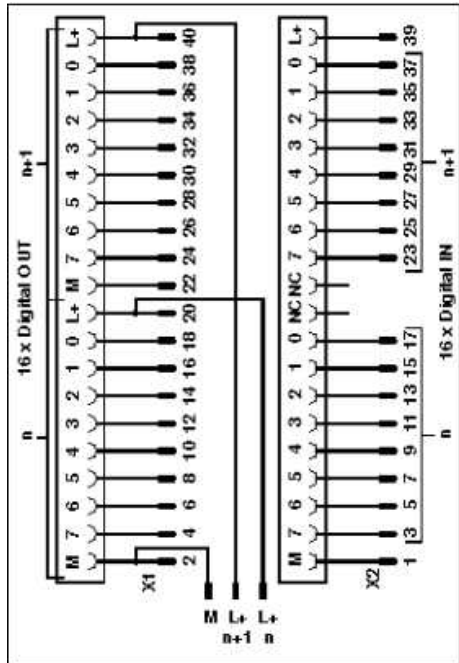

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;