


## SPECIFICATION CONTROL DRAWING

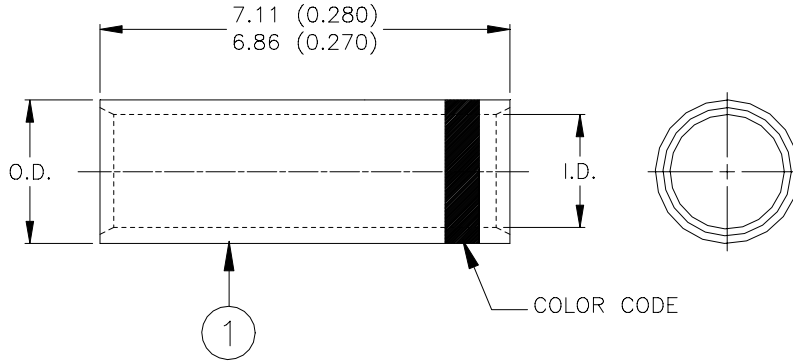

Product Rev		CMA Range*		I.D.	O.D.	Max Weight Lbs./mpc	Color Code
Product Name		min	max				
D-609-03	A	300	1510	<u>1.27 (0.050)</u> 1.13 (0.045)	<u>2.03 (0.080)</u> 1.90 (0.075)	.30	Red
D-609-04	A	779	2680	<u>1.75 (0.069)</u> 1.62 (0.064)	<u>2.69 (0.106)</u> 2.56 (0.101)	.49	Blue
D-609-05	A	1900	6755	<u>2.59 (0.102)</u> 2.46 (0.097)	<u>3.89 (0.153)</u> 3.73 (0.147)	.99	Yellow

\* Not all wire combinations falling within the usable CMA range can be accommodated within the splicer barrel.

### MATERIAL

1. CRIMP SPLICER: Base Metal - Copper Alloy 101 or 102 per ASTM B 75.  
Plating: Tin per MIL-T-10727, Type I.

### APPLICATION

1. Parts shall be of seamless tubular construction.
2. Diameters shall be concentric within 0.127 (0.005) T.I.R.
3. Packing and packaging shall be in accordance with Section 5, Level C, of MIL-S-81824.

<b>tyco</b> Electronics		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		<b>Raychem</b>		TITLE: <b>CRIMP SPLICER, STUB</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: <b>D-609-03/-04/-05</b>	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: <b>31-Jan.-01</b>	
DRAWN BY: <b>M. FORONDA</b>		CAGE CODE: <b>06090</b>		REPLACES: <b>N/A</b>		DCR NUMBER: <b>D010058</b>	
				PROD. REV.: <b>SEE TABLE</b>		SCALE: <b>None</b>	
				SIZE: <b>A</b>		SHEET: <b>1 of 1</b>	

If this document is printed it becomes uncontrolled. Check for the latest revision. © 2004 Tyco Electronics Corporation. All rights reserved